

GDV2104-TNT4A

- Supporting Cloud Server (IDCS)
- Supporting SD Card (32GB)
- Front USB Host Port




Specification



LCD Display	Size	10.4" diagonal
	Resolution	800*600
	Type	TFT LCD with LED Backlight
	Colors	16-bit
	Backlight (hr.)	20,000
	Luminance (cd/m2)	400
Touch Panel		4-wire Analog Touch Panel
CPU		RISC ARM9 32Bit
Battery Backed RAM		1MB
Working Memory		64MB
Application Memory		64MB
Data File Memory		64MB
Real-Time Clock (RTC)		YES (Unchargeable Battery type,5 years battery life)
Max. Pogramming Pages		7999 pages
Max. Macro Commands		Unlimited
Communication Interface	SD Slot	YES(SD Card Max. Memory: 32GB)
	USB Host	YES (2.0)
	USB Client	YES (2.0)
	Serial (Com1)	RS232, RS422,RS485(Only one usage at runtime)
	Serial (Com2)	RS232, RS422,RS485(Only one usage at runtime)
	Serial (Com3)	RS232, RS485(Only one usage at runtime)
Ethernet		YES
Front Function Keys		N/A
Audio out		YES (PT2104-TNT5A Only)
Audio in		N/A
Front USB Host Port		YES
Power	Supply Voltage	24VDC±10%
	Consumption	20W
	Operating Temperature	-10°C~60°C
	Relative Humidity	10%~90%
Environment	Shock (operation)	10 ~ 55Hz(X,Y,Z direction, 1G, 30 minutes shock test)
	FCC	YES
	CE	EN61000-6-2, EN61000-6-4
	UL Certification	N/A
	Ingress Protection	IP65
	Cooling	
Dimension WxHxD (mm)		297 x 224 x 45.75 mm
Cutout Dimension WxH (mm)		285.5 x 210.5 mm
Net Weight (Kg)		1.55

Dimension (mm)

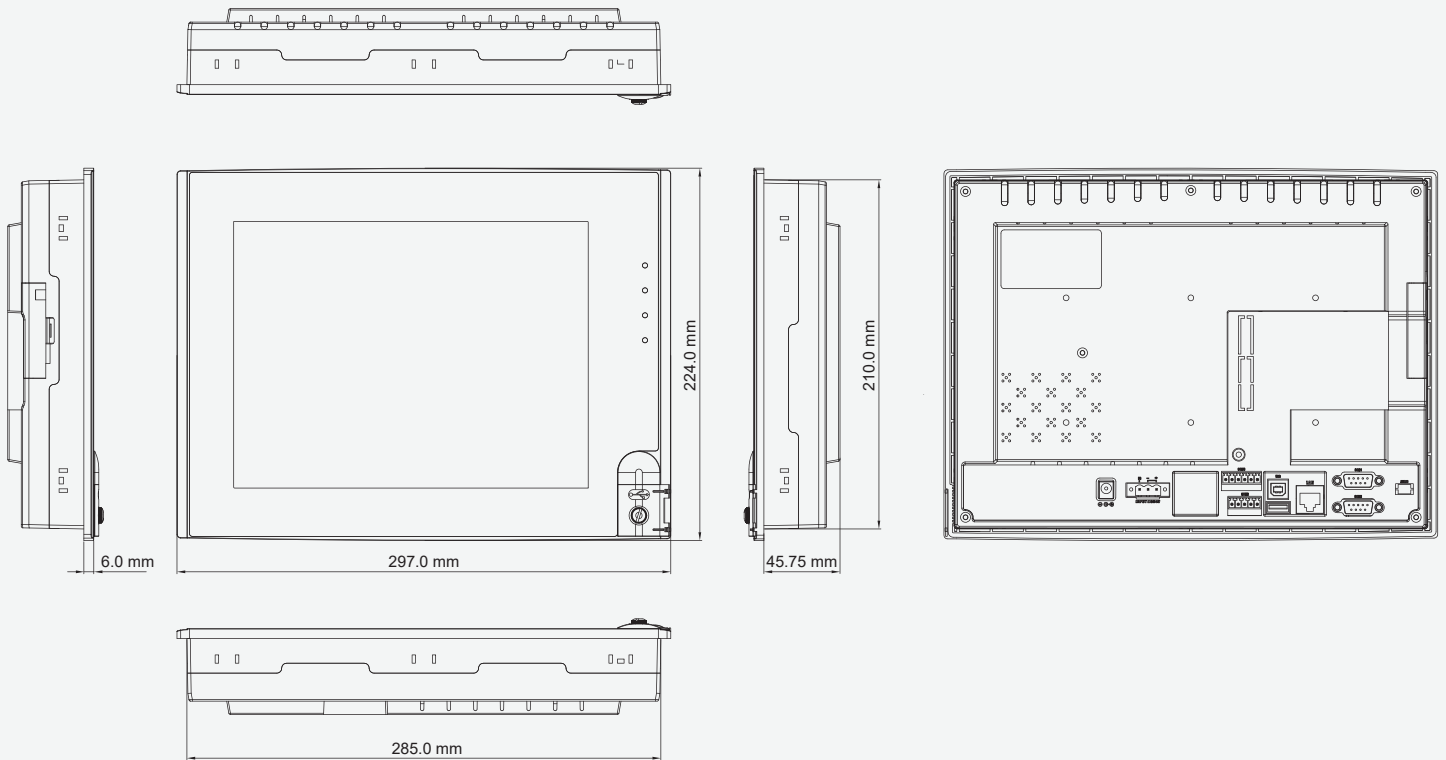

Panel Cut Out Dimensions: 285.5 x 210.5 mm



Please verify specifications before quoting. This guide is intended for reference purposes only.

All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies.