


EHP-SM1-R

LINEAR WIRE POTENTIOMETER

- PRECISION ELECTRIC RESISTANCE SIGNAL OUTPUT
- SUITABLE FOR SHORT TO MEDIUM MEASUREMENT RANGE

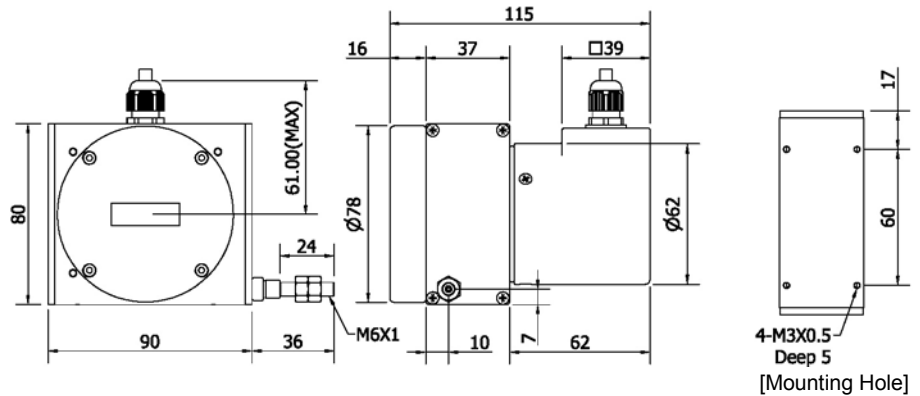

ELECTRICAL SPEC.

Full Stroke (mm) 量測行程	500, 750, 1000, 1500, 2000, 3000, 4000
Sensor	Wire-wound and hybrid potentiometer
Output Signal Mode 輸出信號模式	Resistance (Potentiometer)
Resolution 解析	Essentially infinite
Linearity 線性度	[standard class] $\pm 0.25\%$ FS; [precision class] $\pm 0.1\%$ FS (± 1 count)
Repeatability 重覆性	$\pm 0.02\%$ FS
Output Resistance 輸出電阻值	[standard class] 5K ohm $\pm 10\%$ FS; [precision class] 5K ohm $\pm 5\%$ FS
Power Rating (watts)	[stroke 500 mm] 1 W at 40°C; [stroke ≥ 1000 mm] 2 W at 40°C
Recommended Input Voltage 輸入電壓	30V (AC/DC) max., best voltage at 5 ~ 10 VAC/VDC


MECHANICAL SPEC.

Wire Specification 線徑規格	Diameter: 0.7 mm SUS304 with nylon coating
Max. Travel Speed 最大往復速度	1,000 mm / sec.
Vibration 震動	10 Hz to 2000 Hz, 10 g
Cable 電線	$\varnothing 5.4$, 100 cm long, radial cable output
Weight 重量	< 1,000 g
Starting Torque on Spring 拉力	[(Stroke ≤ 1000 mm) 600 g; [Stroke ≥ 1500 mm] 1000 g

ENVIRONMENTAL SPEC.

Operating Temp. / Humidity 操作溫度/濕度	-20°C ~ 70°C RH35% ~ 90% (No Condensation)
Storage Temp. 儲存溫度	-20°C ~ 80°C
Protection 保護等級	IP64: Dust & Dripping Proof (only for potentiometer housing)

Electrical Connection

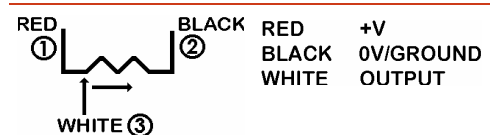

ORDERING INFORMATION

EHP - SM1 -	<i>Measuring Range</i> 量測行程	<i>Signal Mode</i> 信號模式	<i>Potentiometer Life and Linearity</i> 壽命及線性度
	05 : 500 mm 15 : 1500 mm 075 : 750 mm 20 : 2000 mm 10 : 1000 mm 30 : 3000 mm 40 : 4000 mm	R: Resistance 5K ohm	Blank : 1 X 10 ⁶ cycles, linearity 0.25% FS *F: 5 X 10 ⁶ cycles, linearity 0.1% FS *F25: 5 X 10 ⁶ cycles, linearity 0.25% FS