


EHP-SM1-V

LINEAR WIRE POTENTIOMETER

- PRECISION ELECTRIC 0-5V and 0-10V SIGNAL OUTPUT
- SUITABLE FOR SHORT TO MEDIUM MEASUREMENT RANGE

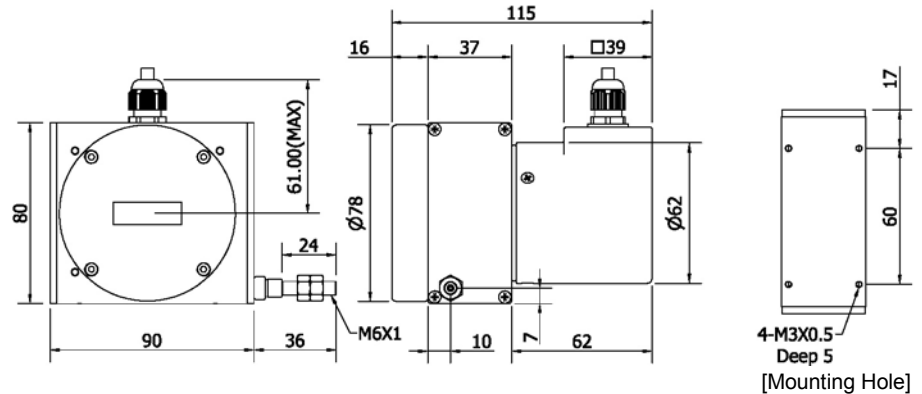

ELECTRICAL SPEC.

Full Stroke (mm) 量測行程	500, 750, 1000, 1500, 2000, 3000, 4000
Sensor	Wire-wound and hybrid potentiometer
Output Signal Mode 輸出信號模式	0-5Vdc or 0-10Vdc
Resolution 解析	Essentially infinite
Linearity 線性度	[standard class] $\pm 0.3\%$ FS; [precision class] $\pm 0.15\%$ FS (± 1 count)
Repeatability 重覆性	$\pm 0.05\%$ FS
Input Power 供應電壓	10-30Vdc for 0-5V output; 15-30Vdc for 0-10V output
Input Current 供應電流	10 mA max.


MECHANICAL SPEC.

Wire Specification 線徑規格	Diameter: 0.7 mm SUS304 with nylon coating
Max. Travel Speed 最大往復速度	1,000 mm / sec.
Vibration 震動	10 Hz to 2000 Hz, 10 g
Cable 電線	$\varnothing 5.4$, 100 cm long, radial cable output
Weight 重量	< 1,000 g
Starting Torque on Spring 拉力	[Stroke \leq 1000 mm] 600 g; [Stroke \geq 1500 mm] 1000 g

ENVIRONMENTAL SPEC.

Operating Temp. / Humidity 操作溫度/濕度	0°C ~ 70°C
Storage Temp. 儲存溫度	-20°C ~ 80°C
Protection 保護等級	IP64: Dust & Dripping Proof (only for potentiometer housing)

Electrical Connection

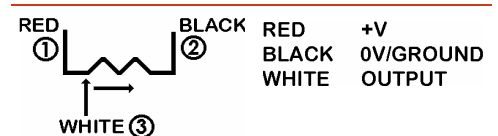

ORDERING INFORMATION

EHP - SM1 -	Measuring Range 量測行程		Signal Mode 信號模式	Life 壽命及線性度		
	05 : 500 mm	15 : 1500 mm			*5V: 0-5Vdc	Blank: 1 X 10 ⁶ cycles, linearity 0.3% FS
	075 : 750 mm	20 : 2000 mm			*10V: 0-10Vdc	*F: 5 X 10 ⁶ cycles, linearity 0.15% FS
	10 : 1000 mm	30 : 3000 mm				*F25: 5 X 10 ⁶ cycles, linearity 0.3% FS
		40 : 4000 mm				