

特點

- 精確度0.05%滿刻度±1位數
- 可量測交直流電流/交直流電壓/電位計/傳送器/P-100荷重元/電阻等信號
- 顯示範圍0~19999可任意規劃
- 小數點可任意規劃
- 尺寸小,穩定性高





1. 選購型號: MA-S2-□□□

NO	Input Type	NO	DCV(ACV)	NO	DCA(ACA)	NO	Potentiometer	NO	Transmitter	NO	Pt-100	NO	Resistor	NO	DISPLAY
A	DC	11	0~50mV	21	0~19.999uA	31	0~10%	41	DC4~20mA	51	-50.00~+50.00°C	71	0~19.999Ω	A	0.56"(14.22mm)
B	AC(RMS)	12	0~5V	22	0~199.99uA	32	0~50%	42	DC1~5V	52	-100.00~+100.00°C	72	0~199.99Ω	B	0.8"(20.32mm)
C	AC(TRMS)	13	0~10V	23	0~1.9999mA	33	0~100%	43	DC4~20mA	53	-200.0~+400.0°C	73	0~1.9999KΩ	● MA-S2-□□□□ B programmable rate 0~9999 digit	
D	Potentiometer	14	0~36V	24	0~19.999mA	34	5~95%	44	DC1~5V	54	-200.0~+850.0°C	74	0~19.999KΩ		
E	Transmitter	15	0~54V	25	0~199.99mA	35	10~90%	49	SPECIFIED	59	SPECIFIED	75	0~199.99KΩ		
F	Pt-100(RTD)	16	0~110V	26	0~2.000A	39	SPECIFIED	●41/42 nonexciting DC20V		●Three wire connection		79	SPECIFIED		
R	Resistor	17	0~600V	27	0~5.000A	●Three wire connection ●Exciting voltage DC2.5V(<10mA)		●43/44 exciting DC20V(<25mA)		●non-programmable		●Exciting current 10mA to 5uA			
O	SPECIFIED	18	0~1000V	28	0~10.000A										
		19	SPECIFIED	29	SPECIFIED										

2. 主要規格


- Aux. power supply : AC110V & 220V±20%(50/60Hz) (輔助電源)
- Measuring accuracy : 0.05% F.S.±1 digit (精確度) (23±5°C) 0.2% F.S.±1 digit(AC(RMS))
- Sampling time : 2 cycles/sec. (取樣時間)
- Zero (offset) range : 0~±100 digit adjustable (歸零調整範圍)
- Over input indication : "0000" flash (過載顯示)
- Display : Red high efficiency LEDs high 14.22mm(0.56")M2-□□□□ A
Red high efficiency LEDs high 20.32mm(0.8")M2-□□□□ B (顯示幕)
- Polarity display : When input is negative " - " display (極性顯示)
- Temp. coefficient : 50ppm/°C (0~50°C) (溫度係數)
- Dielectric strength : 2KVac/1 min. (input/power) (絕緣耐壓能力)
- Operating condition : 0~50°C (20 to 90% RH non-condensed) (使用環境條件)
- Storage condition : 0~70°C (20 to 90% RH non-condensed) (存放環境條件)

3. 外型/開孔尺寸與配線圖

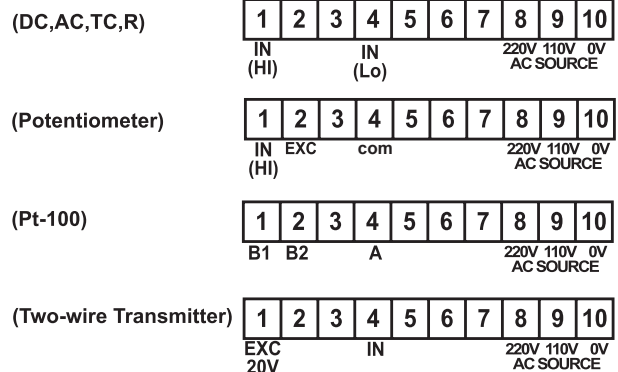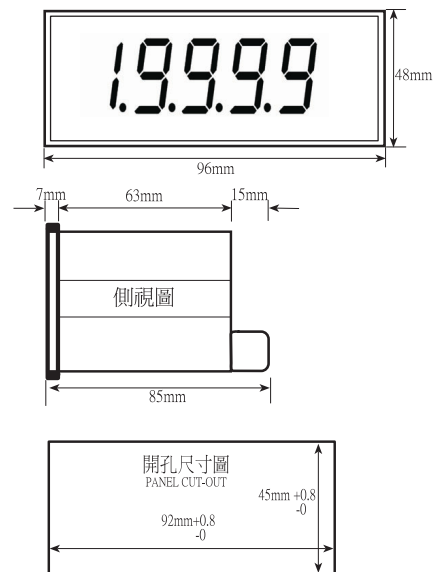

3. Program of span and zero and decimal point set

(顯示值之小數點設定與歸零值與最大值校正位置圖)

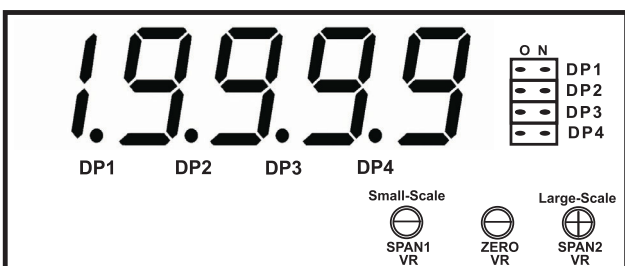

最大值微調 歸零微調 最大值粗調