


■ 特點

- Input : 9 pin female RS-232 (PC)
- Output(TI-RS24) : 9 pin male RS-482
Output(TI-RS25) : 9 pin male RS-485
- Input power(TI-RS24) : 5VDC or 24VDC
Input power(TI-RS25) : 5VDC

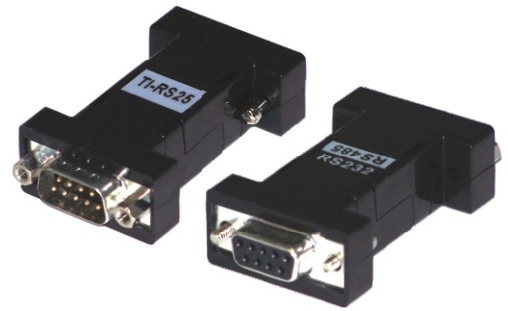

■ TYPE : TI-RS - V

NO.	Communication	NO.	Voltage
24	RS-422	5	5V
25	RS-485	24	24V

■ 規格

- 電腦側接頭 : DB-9 母接頭
- 體積 : 17x33x63(mm)
- 耗電 : 5V, 50mA
24V, 25mA
- 指示燈 : 無

■ 腳位定義

DB9 母

- (2) RS232_TX
- (3) RS232_RX
- (5) SG
- (7,8) 短路


DB9 公 (RS422)

- (1) RX+
- (2) RX-
- (3) TX-
- (4) TX+
- (5) SG
- (9) +5V 輸入

DB9 公 (RS485)

- (3) Data-
- (4) Data+
- (5) SG
- (9) +5V 或 +24V

■ 外型尺寸 (Unit:mm)

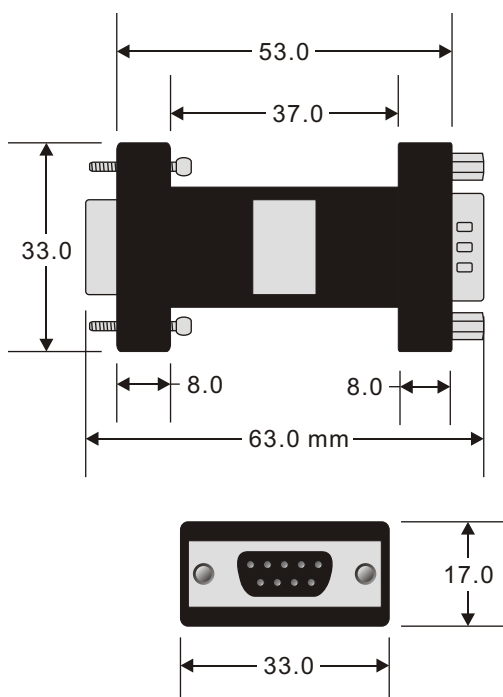

■ 應用例

